


Canopy Setup Instructions

- Two installers should be able to assemble a canopy in thirty to sixty minutes
- Hammer required to drive stakes
- Call 811 for National One Call for utility locate on the site. Prior to assembly, be sure to look around the area for obstacles, pipes, overhead wires, etc


<u>Canopy Size</u>	<u># Long Poles</u>	<u># Short Poles</u>	<u>#Stakes</u>
20x20	10	9	12
20x30	14	12	14
20x40	18	15	16

All canopies include a bag with the top in it.


Step 1: Unroll canopy at desired location. Any sharp objects which must remain on site under the canopy should be padded and taped to prevent damage to the canopy top. Drive a stake through the ring attached to each guy rope about 5 feet from the edge of the canopy. Drive stake until about 3 inches is sticking out of the ground

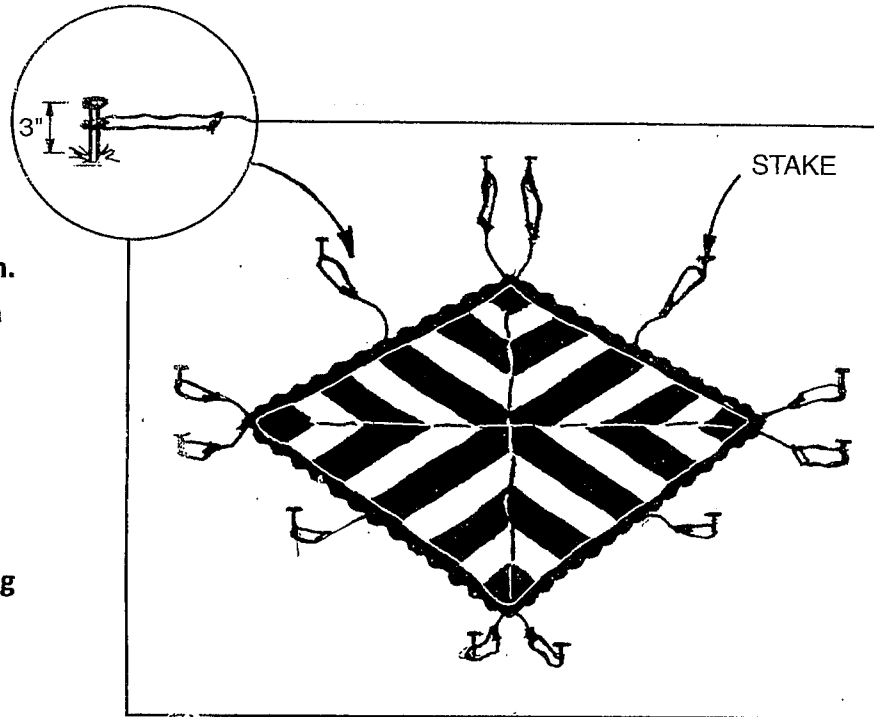


Step 2: Side poles are assembled using 1 long and 1 short pole. Starting at opposite corners, insert side poles into pole holes and raise the top so that the bottom of poles slant toward center of canopy. Adjust guy rope and continue with the other two corners and then the side poles.

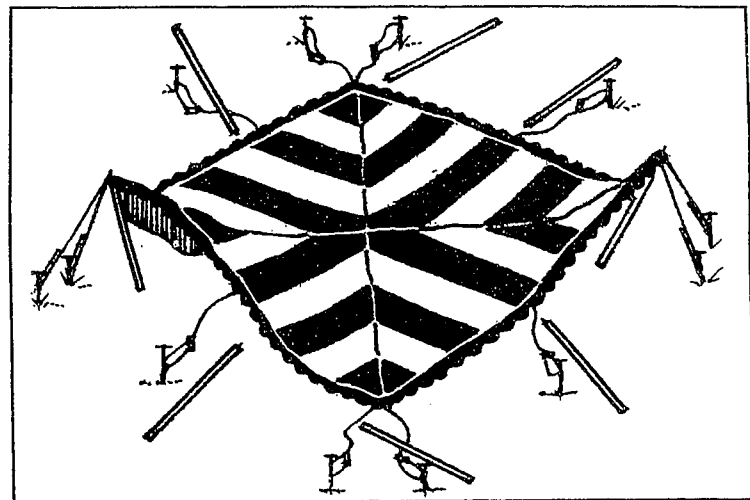

Step 3: Raise the center pole. Assemble a 3 piece center pole(s) from 1 short pole and 2 long poles. Insert pole into center pole hole. Raise to upright position and tie off jump rope to pole.

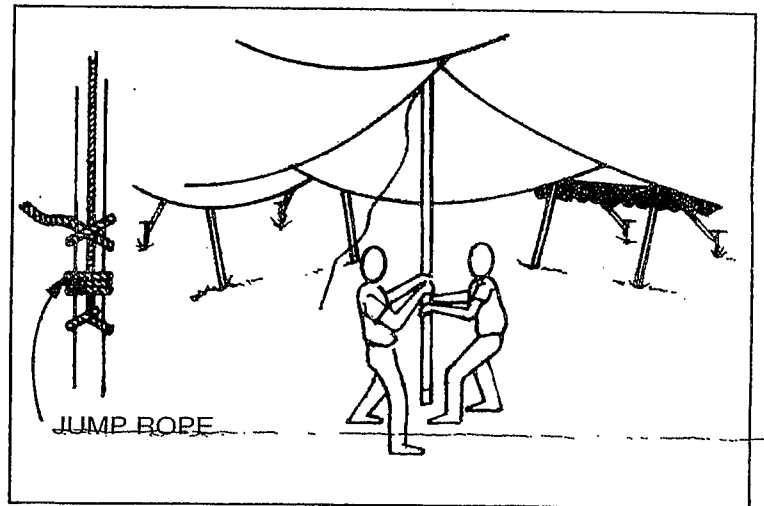

Step 4: Tighten guy ropes and then set side poles to upright position. Adjust pole positions and guy rope tension to properly put out canopy.

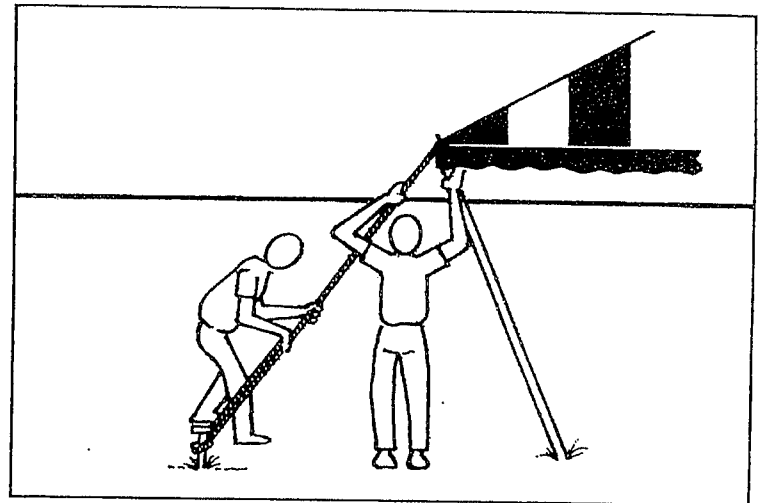

Step 5: To take down, loosen all guy ropes and reverse the steps above.

Important: Check Guy Ropes periodically for tightness and maintaining of good condition. Stakes provided are for average soil conditions. Sandy soil or asphalt may require additional staking. Proper installation suitable to site conditions is the responsibility of the installer.